

Sliding Table Saw

RTJ-45A



➤ Feature


Apply to processing all kinds of density boards, shaving boards, wood-based panels, ABS panels, PVC panels, solid wood and others with wood structure and similar hardness.

➤ Detail


1. Saw motor structure for electrical lift and manual tilt.



2. The rip fence almost hovers over the table. The single handed quick clamping and fine adjustment systems ensure quick and accurate setting of the rip fence.

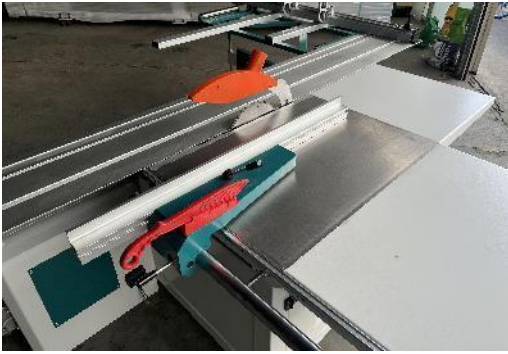

3. Small cover for saw blades

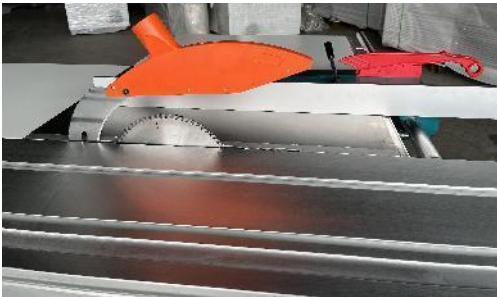

4. Manual tilt handle and control panel(Digital angle readout is optional)




5. Angle ruler for sliding table



6. The solid outrigger makes it possible to process large and heavy workpieces



7. The crosscut fence can be attached to the sliding table without the use of tools. The end stop provides you with the exact 90° position.

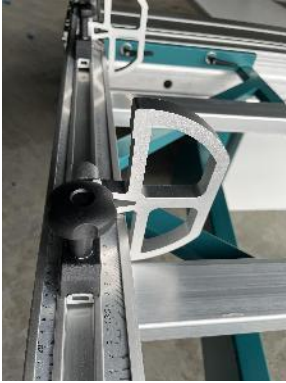

8. Electrical box



9. Manual press device



➤ **Optional:**

1. Big cover for saw blades



2. Press devices controlled by cylinders



3. Digital angle readout



4. Manual lift and tilt (RTJ-45A)



➤ **Parameter**

| | |
|--|------------------|
| Model | RTJ-45A |
| Sliding table size | 3200x390mm |
| Main saw blade diameter | 300mm |
| Inner hole diameter of main saw blade | 30mm |
| Scoring saw blade diameter | 120mm |
| Inner hole diameter of scoring saw blade | 20mm |
| Speed of main saw spindle | 4000/5000r/min |
| Speed of scoring saw spindle | 9000r/min |
| Max. cutting thickness | 80mm |
| Angle of inclination | 45° |
| Main saw motor power | 5.5kw |
| Scoring saw motor power | 1.1kw |
| Dust collect outlet | Φ100mm×1 |
| Size | 3400*2600*1000mm |
| Weight | 650kg |