



MULTI-HEAD MACHINES

BORING SYSTEM 323 DIGIT

Semiautomatic, multispindle 3-head boring machine with n.1 horizontal fixed boring head and n. 2 turnable vertical boring heads

For **horizontal** and **vertical drilling** into **wood-based panels**; for the production of big-size pieces of **furniture**. The ideal solution for **bookcase**, **bookshelf** and **wardrobe manufacturers**.

- Small footprint: 2 sqm

- The quick set-up devices and the 3 boring heads, working simultaneously, considerably speed up the working process with respect to a single-head boring machine

More than 3.000 machines manufactured, over thirty years' experience .100% made-in-Italy machines abiding by the highest quality standards as a result of the "Lean" manufacturing process, also known as "Toyota System".

TECHNICAL FEATURES MODEL

N.2 vertical parallel boring heads with 23 spindles each.

Distance between the heads : Max 650 mm / Min. 130 mm

Distance between first and last spindle : 704 mm - 32 mm intereaxis

Quick-change spindles

Boring-depth adjustment on numeric counters

Ready to be connected to a dust collector

Manufactured abiding by EC standards

STANDARD EQUIPMENT

N.3- 2 HP motors

N.2 hold-down clamps turning from 0° to 90° with well-dimensioned wooden bar 750x106x30 mm

N.15 quick-change chucks

N.1 - 3000 x 120 mm fence with 4 manual ref. stops sliding on guides and ball bearings; two of them are with nonius and two of them are equipped with digital read-out displays


Reference stop for the long panels

Ready to be connected to a dust collector

Package: carton box


Manufactured according to EC standards

MORE INFORMATION

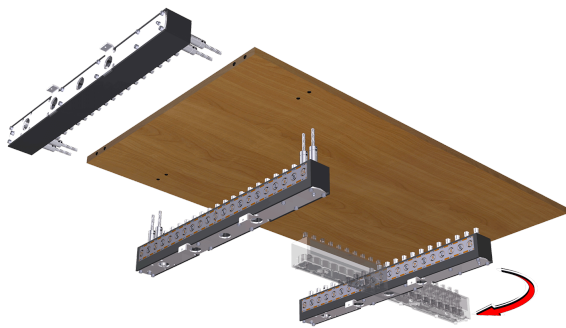


HIGH PRODUCTIVITY

It performs all the drilling operations to build up a cabinet in just two working cycles: the two vertical boring heads drill the holes for the side panels while the horizontal boring head makes the holes for the panel joints.

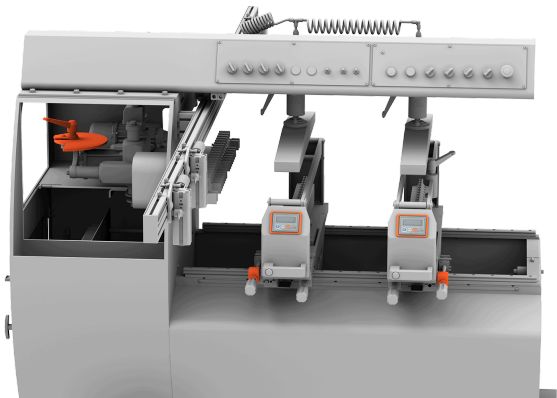


QUICK SET-UP

Quick and accurate positioning of the vertical boring-heads thanks to a pneumatic locking system, digital read-out displays and micrometric adjustment devices. Boring-depth and boring-height adjustment of the horizontal head is also easy and fast thanks to the "Spyral System" and the numeric counters.

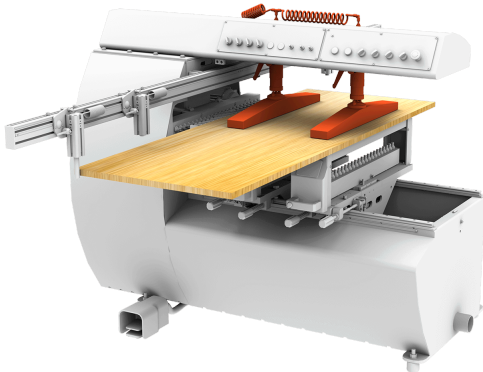


EFFECTIVE PANEL HOLD-DOWN AND DRILLING ACCURACY

N.2 quick-adjustable, pneumatic, safety clamps, swivelling from 0° to 90°, ensure the perfect panel hold-down, which results into always accurate drilling operations.

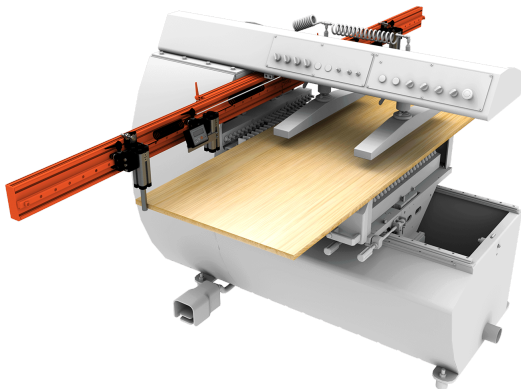

QUICK AND ACCURATE PANEL POSITIONING

Thanks to N.2 reference stops with digital read-out displays and n.2 reference stops with magnify glass and nonius sliding on ball bearings along the aluminum fence (3000x120 mm).

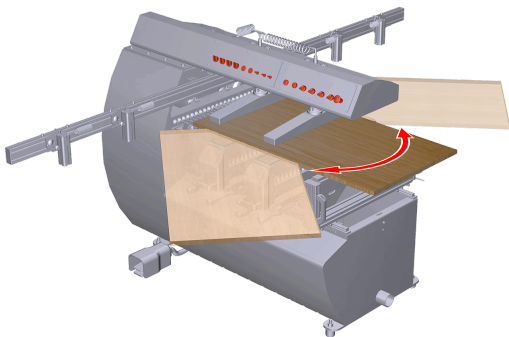

COMFORT


Easy positioning of the long panels thanks to the "Cantilever" structure and to the wide and solid holding tables made of steel. The panel drive is on the front side, easily accessible for the operator.



FAST AND EFFECTIVE

Thanks to the quick-set-up devices and the 3 boring heads working simultaneously, it considerably speeds up the drilling process with respect to a single-head boring machine. Perfectly suited to process big-size panels.

MORE INFORMATION

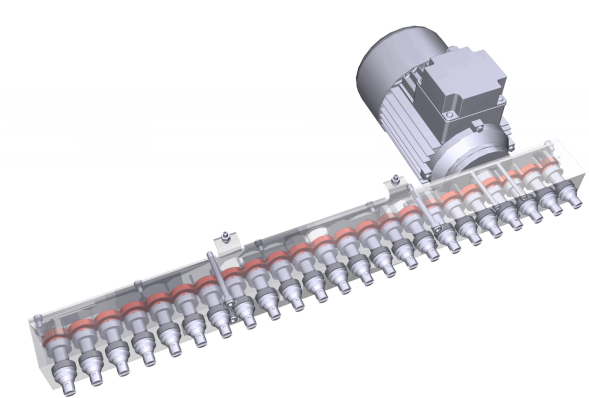


SOLID STRUCTURE

Made of steel, built to last. Eco-friendly, rust-resistant powder coating. Boring heads are made of aluminium, while internal gears are made of rectified steel.



DATA SHEET

Boring heads	N. 3
Distance between the heads min. - max.	150 - 867 mm
Spindles each head	N. 23
Left and right spindles for each head	N. 11 - N. 12
Spindle interaxis	32 mm
Total interaxis	704 mm
Distance between rear head n°1 and rear fence (min. - max.)	9 - 450 mm
Distance between front head n°2 and rear fence (min.- max.)	159 - 876 mm
Max. tool diameter	40 mm
Max. boring depth	50 mm verticale / 65 mm orizzontale
Height of the working table	900 mm
Max. panel thickness	60 mm
Max. panel dimensions	870 x 3000 x 60mm
N° motors	HP 2 / KW 1,5 - RPM 2800 (x 3)
Standard pneumatic pressure	BAR 6/8
Air consumption per working cycle	NL 30
Dust-collection hood diam.	80 mm
Overall dimensions (incl. full extended side roller tables) (incl. long fence mounted)	1790 x 1000 x 1350 mm
Net weight	750 kg
Package dimensions (machine)	1900 x 1150 x 1500
Fence package dimensions (each carton - n.2 cartons on the whole)	
Total gross weight	850 kg

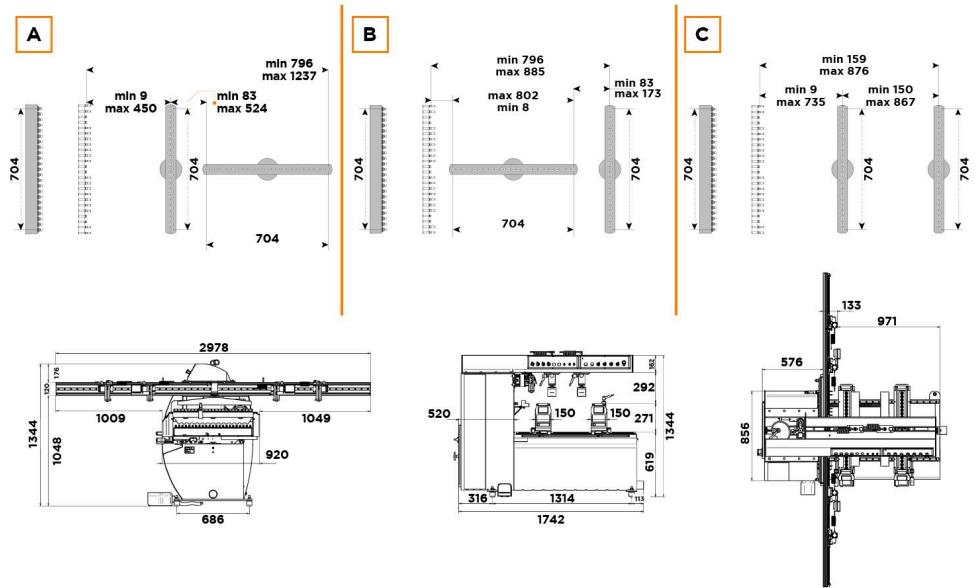

ACCESSORIES

Quick-drill of hinge holes



Drilling aggregate for hinges, type "Salice"

To drill the three hinge holes in one single working cycle

DRILL-BITS NOT INCLUDED

CODICE: 00008391

Quick-drill of hinge holes



Drilling aggregate for hinges, type "Blum"

To drill the three hinge holes in one single working cycle

DRILL-BITS NOT INCLUDED

CODICE: 00008392

Quick-drill of hinge holes




Drilling aggregate for hinges, type "Hettich"

To drill the three hinge holes in one single working cycle

DRILL-BITS NOT INCLUDED

CODICE: 00008393

Ergonomics
Increase the accuracy of the working process




Additional panel support

It provides an additional support for the long panels, increasing their stability during the working process

CODICE: 26800215

Increase the accuracy of the working process




Supports for long panels on the aluminum fence

It provides an additional support for the long panels, increasing their stability during the working process

N.2 supports for long panels on the aluminum fence

CODICE: 26850623

Quicker set-up



Pneumatic ref. stops


For an even quicker and more accurate set-up

N.2 pneumatic ref. stops with digital read-out display, sliding on the long fence

CODICE: 26850624

ACCESSORIES

Quicker set-up

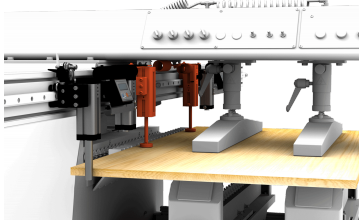


Hold-down clamps on the aluminum fence

To increase the hold-down pressure on the working panel and consequently its stability during the drilling process

N.2 hold-down clamps on the aluminum fence

CODICE: 26850622

Increase the accuracy of the working process



n.2 dynamic brakes

For a constant and even movement of the two vertical boring heads during the drilling process

CODICE: 26800403

Improve the comfort



Independent idle-roller table 500x1500 mm

To make the handling of large-size panels easier for the operator

Independent idle-roller table 500x1500 mm (idle-roller surface only) 562x1540 mm (incl.frame), adjustable height from 770 to 1.175 mm, max. capacity 45 Kg/m. It can be installed both sides of the machine

CODICE: 27304100

Special voltages

Single-phase Motor

To have the machine working in small handcraft shops having an electric system running on 220 VIts

CODICE:


Special voltages

"CSA" standards

Electrical standards abiding by the Canadian wiring regulations

CODICE:

Increase the accuracy of the working process

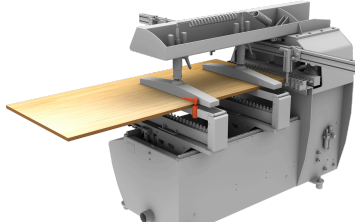



Reference stop for long panels

It provides an additional reference point for the positioning of long panels, increasing their stability and consequently the accuracy of the working process.

CODICE: 26800203

ACCESSORIES

Ergonomics



Quick-change bush / chuck

By using these quick-change tool-holders, You can mount Your drill-bits on the boring head in just "one click"

CODICE: 36000061

Recommended tools



Tool set made up of 3 drill-bits for hinges

Recommended drill-bit set for drilling aggregate for hinges, made up of n. 2 left-handed drill-bits 8mm diameter and n.1 right-handed drill-bit 35 mm diameter

Tool set made up of 3 drill-bits for hinges

CODICE: 26845821