


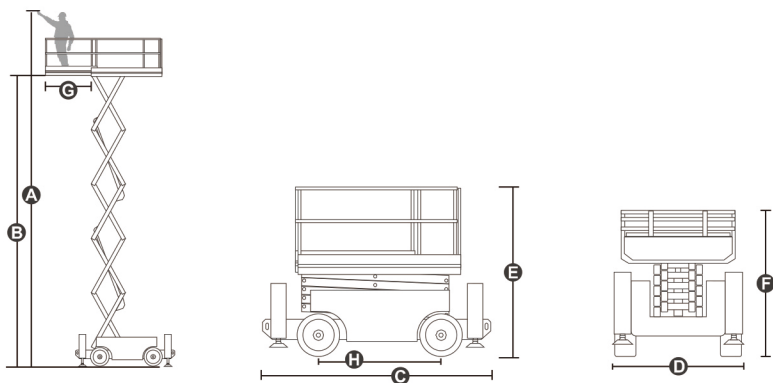

Model	JCPT1218RT	JCPT1218DC
Dimension		
Max. Working Height (Indoor) CE,ANSI92.20 A	12.00m 39ft 4in	12.00m 39ft 4in
Max. Working Height (Outdoor) ANSI92.20 B	12.00m 39ft 4in	12.00m 39ft 4in
Max. Platform Height (Indoor) CE,ANSI92.20	10.00m 32ft 10in	10.00m 32ft 10in
Max. Platform Height (Outdoor) ANSI92.20	10.00m 32ft 10in	10.00m 32ft 10in
Overall Length(Without Outriggers)	3.19m 10ft 6in	3.19m 10ft 6in
Overall Length(With Outriggers) C	3.84m 12ft 7in	3.84m 12ft 7in
Overall Width D	1.76m 5ft 9in	1.76m 5ft 9in
Overall Height(Rails Up) E	2.59m 8ft 6in	2.59m 8ft 6in
Overall Height(Rails Down) F	1.82m 6ft	1.82m 6ft
Platform Size(L×W)	2.88m×1.52m 9ft 5in × 5ft	2.88m×1.52m 9ft 5in × 5ft
Platform Extension Size G	1.43m 4ft 8in	1.43m 4ft 8in
Ground Clearance(Stowed/Raised)	0.24m 9in	0.24m 9in
Wheelbase H	2.29m 7ft 6in	2.29m 7ft 6in
Turning Radius(Inside/Outside)	2.15m/4.85m 7ft 1in/15ft 11in	2.15m/4.85m 7ft 1in/15ft 11in
Tyres	26×12-16.5	26×12-16.5
Performance		
S.W.L	454kg 1000lb	454kg 1000lb
S.W.L On Extension	136kg 299lb	136kg 299lb
Max. Occupants (Indoor/Outdoor) CE	4/2	4/2
Max. Occupants (Indoor/Outdoor) ANSI92.20	4/2	4/2
Gradeability	40%	40%
Travel Speed(Stowed)	5.0km/h 3.10mph	6.0km/h 3.73mph
Travel Speed(Raised)	0.45km/h 0.28mph	0.45km/h 0.28mph
Max. Working Slope	1.5°/3°	1.5°/3°
Up/Down Speed	38/46sec	40/46sec
Weight		
Overall Weight(Without Outriggers)	3900kg 8598lb	4135kg 9116lb
Overall Weight(With Outriggers)	4300kg 9479lb	4400kg 9700lb
Power		
Diesel Engine	18.2kW/3000rpm	/
Diesel Tank	47L 12.4gal	/
Hydraulic Tank	71L 18.7gal	71L 18.7gal
Battery(Lead-acid Battery)	/	48V/320Ah
Charger	/	48V/35A
Driving Motor	/	2×32VAC/3.3kW
Lifting Motor	/	48VDC/3.8kW